



# LAC 650 SL

680 G/M<sup>2</sup> PES/PVC



# LAC 650 SL

**5** ANS\*  
YEARS  
GARANTIE - WARRANTY



UPF 50+




680 g/m<sup>2</sup>



M2 / B1 / BS  
NFPA701  
B-S2-D0




3m



**L65S 7310**

3.00 m x 30-60-250 ml  
2.50 m x 60-250 ml




**L65S 0867**

(RAL 9010)  
3.00 m x 30-60-250 ml  
2.50 m x 60-250 ml



**L65S 7462**

3.00 m x 30-60-250 ml  
2.50 m x 60-250 ml



**L65S 7457**

3.00 m x 30-60 ml




**L65S 7458**

(RAL 1015)  
3.00 m x 30-60 ml




**L65S 7409**

3.00 m x 30-60-250 ml




**L65S 0654**

3.00 m x 30-60-250 ml



**L65S 7379**

(RAL 7040)  
3.00 m x 30-60 ml




**L65S 0652**

3.00 m x 30-60 ml




**L65S 0939**

3.00 m x 30-60-250 ml




**L65S 7534**

3.00 m x 30-60 ml




**L65S 0887**

(RAL 8017\*)  
3.00 m x 30-60 ml



**L65S 7426**

3.00 m x 30-60 ml



**L65S 7419**

3.00 m x 30-60-250 ml



**L65S 0810**

(RAL 9005)  
3.00 m x 30-60-250 ml



**L65S 7309**

(RAL 5013)  
3.00 m x 30-60 ml



**L65S 0567**

3.00 m x 30-60 ml



**L65S 0995**

(RAL 6026)

3.00 m x 30-60-250 ml



**L65S 7539**

(RAL 6018\*)

3.00 m x 30-60 ml



**L65S 7533**

3.00 m x 30-60 ml



**L65S 7500**

3.00 m x 30-60 ml



**L65S 7507**

(RAL 3002\*)

3.00 m x 30-60-250 ml



**L65S 7538**

3.00 m x 30-60 ml



**L65S 7456**

(RAL 1003)

3.00 m x 30-60 ml



**L65S 0941**


3.00 m x 30-60-250 ml



**L65S 7450**

(RAL 5015)

3.00 m x 30-60-250 ml



**L65S 7522**

3.00 m x 30-60 ml

**LAC 650 SL CARBON**

Bicolor



**L65C 7542**

3.00 m x 30-60 ml



**L65C 7541**


































































3.00 m x 30-60 ml



**L65C 7540**

3.00 m x 30-60 ml

## LAC 650 SL

COLOR			Gtot EXT			
7310	74	14	0,09		9	
867	75	12	0,09		11	
7462	73	16	0,09		9	
7457	66	26	0,07		6	
7458	68	24	0,08		5	
7409	54	41	0,07		0,2	
939	28	72	0,06		0	
654	46	54	0,05		0	
7379	32	68	0,06		0	
652	26	74	0,07		0	
7534	14	86	0,08		0	
887	14	86	0,08		0	
7426	8	92	0,09		0	
7419	6	94	0,09		0	
810	5	95	0,09		0	
7309	9	90	0,09		0	
567	35	59	0,1		0	
995	22	72	0,06		0	
7539	38	56	0,09		0,5	
7533	56	34	0,1		7	
7500	47	42	0,11		0,7	
7507	24	71	0,1		0,2	
7538	53	36	0,1		3,2	
7456	53	35	0,11		7	
941	27	66	0,1		0	
7450	31	65	0,08		0	
7522	38	62	0,07		0	
7542	35	59	0,1		0	
7541	14	86	0,08		0	
7540	6	94	0,09		0	



**Solar Reflexion (%)**  
*Réflexion Solaire (%) / Wärme Reflektion (%)*  
*Reflexión Solar (%) / Riflessione Solare (%)*



**Solar Absorption (%)**  
*Absorption Solaire (%) / Wärme Absorption (%)*  
*Absorción Solar (%) / Assorbimento Solare (%)*



**Solar factor of the combination of fabric + reference glazing C**  
*Facteur solaire de l'ensemble toile + vitrage de référence C*  
*Gesamtenergiedurchlassgrad der Kombination Verglasung C + Sonnenschutz*  
*Factor solar de la combinación del tejido + vidrio de referencia C*  
*Fattore solare dell'insieme telo + vetro di riferimento C*



**Opaque**  
*Opaque / Opak / Opaco / Opaco*



**Thermal Comfort**  
*Confort Thermique / Wärme-Komfort*  
*Confort Térmico / Comfort Termico*



**Visual Transmission (%)**  
*Transmission Visuelle (%) / Licht Transmission (%)*  
*Transmisión Visual (%) / Transmissione Visiva (%)*



**Visual Protection**  
*Protection Visuelle / Visueller Schutz*  
*Protección Visual / Protezione Visiva*



UPF 50+

**UV Protection 100%**  
*Protection UV 100% / UV-Schutz 100%*  
*Protección UV 100% / Protezione U.V. 100%*

## Lac 650 SL

<b>Base cloth</b> <i>Support / Trägergewebe</i> <i>Soporte / Supporto</i>	1100 dtex PES HT
<b>Width</b> <i>Laize / Breite / Ancho / Altezza</i>	2.50 - 3.00 m
<b>Coating</b> <i>Enduction / Beschichtung</i> <i>Revestimiento / Spalmatura</i>	PVC (Lowick)
<b>Finish</b> <i>Finition / Ausstattung / Acabado / Finizione</i>	Cleangard
<b>Total weight</b> <i>Poids Total / Gesamtgewicht</i> <i>Peso total / Peso totale</i>	680 g/m <sup>2</sup>
<b>Tensile strength</b> > NF EN ISO 1421 <i>Résistance rupture / Reissfestigkeit /</i> <i>Resistencia a la rotura / Resistenza alla rottura</i>	260/250 daN/5cm
<b>Tear strength</b> > DIN 53363 <i>Résistance déchirure / Weiterreissfestigkeit</i> <i>Resistencia al desgarro / Resistenza allo strappo</i>	32/28 daN
<b>Adhesion</b> > NF EN ISO 2411 <i>Adhérence / Haftung / Adherencia / Aderenza</i>	8 daN / 5 cm
<b>Elongation under load (W / W)</b> > NF EN 15619 <i>Allongement sous charge (Ch / Tr)</i> <i>Verbleibende Verformung (K / S)</i> <i>Alargamiento bajo carga (urdimbre / trama)</i> <i>Allungamento sotto carico (ordito / trama)</i>	<1% / <2%
<b>Residual deformation (W / W)</b> > NF EN 15619 <i>Déformation résiduelle (Ch / Tr)</i> <i>Dehnung unter Last (K / S)</i> <i>Deformación residual (urdimbre / trama)</i> <i>Deformazione residua (ordito / trama)</i>	<0.4% / <0.8%
<b>Temperature resistance</b> > NF EN 1876-2 <i>Températures d'utilisation</i> <i>Temperaturbeständigkeit</i> <i>Resistencia máxima a la temperatura</i> <i>Resistenza alla temperatura</i>	-30°C +70°C (24h)
<b>Flame Retardancy</b> > NF P 92503 / DIN 4102 / BS 7837 <i>Ignifugation / Brennverhalten</i> <i>Ignifugación / Ignifugazione</i>	M2 / B1 / BS NFPA701 B-S2-D0

*Average values, non-contractual*

*Valeurs moyennes, non-contractuelles / Alle angegebenen Werte sind ca. Werte / Valores medios y no contractuales / Questi valori medi non hanno valore contrattuale*



### Dickson PVC fabrics are recyclable

 *Les produits PVC Dickson sont recyclables*

 *Alle PVC-beschichteten Dickson Produkte sind recyclebar*

 *Todos los artículos recubiertos de PVC Dickson son reciclables*


 *Tutti i prodotti in PVC Dickson sono riciclabili*




### All PVC coated fabrics can be slit

 *Tous les articles enduits PVC sont tronçonnables*

 *Für alle PVC-beschichteten Produkte gibt es den Schneide-Service*


 *Todos los artículos recubiertos de PVC se pueden cortar*

 *Tutti i prodotti spalmati in PVC si possono tagliare nella misura desiderata*



### Other colours are available on special production

 *Autres coloris possibles sur fabrications spéciales*





 *Andere Farbe mit Sonderproduktion möglich*

 *Otros colores disponibles bajo pedido mínimo*


 *È possibile realizzare colori diversi per produzioni speciali*

# SYSTEM LOWICK

Dickson's unique anti-wicking process helps the fabric to last longer and look like new.

-  *Traitement spécifique à Dickson pour empêcher la moisissure par capillarité. Le tissu dure plus longtemps et garde son aspect d'origine.*
-  *Das einzigartige Herstellungsverfahren von Dickson verhindert Schimmelbildung. Das Gewebe hat eine längere Lebensdauer und behält seine ursprüngliche Optik.*
-  *Tratamiento específico de Dickson para evitar el moho por capilaridad, ayuda al tejido a durar más tiempo y se vea como nuevo.*
-  *Trattamento specifico Dickson per impedire la muffa per capillarità. Il tessuto aumenta la sua durata nel tempo mantenendo il suo aspetto originale.*


## Classic coatings

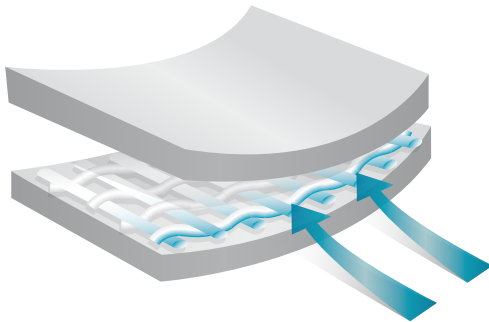

### Moisture penetration

*Enduction classique : pénétration de l'humidité*  
*Klassisches Beschichtungsverfahren : feuchtigkeitsdurchdringung*  
*Recubrimiento clásico : penetración de humedad*  
*Spalmatura classica : penetrazione dell'umidità*

## Dickson's LOWICK System

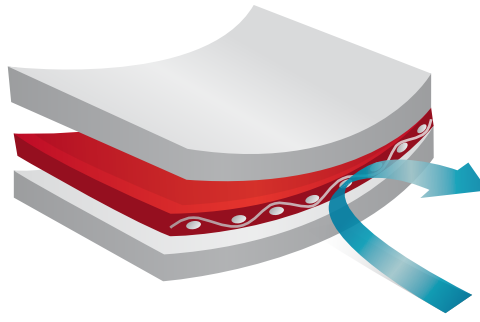





### Total coating impregnation of the yarn

*Imprégnation totale des fils dans la matière*  
*Vollständige Imprägnierung des Garns im Gewebe*  
*Impregnación total del hilo del material*  
*Impregnazione totale dei fili nel materiale*

## FINITION CLEANGARD

The smooth Cleangard topcoat lacquer prevents soiling and facilitates cleaning. A solid protection against weathering.

-  *Traitement sur les deux faces pour un état de surface lisse et moins salissant. Une protection résistante aux intempéries.*
-  *Oberflächenbehandlung auf beiden Seiten für eine glatte und stärker schmutzabweisende Oberfläche. Wirksamer Schutz gegen Witterungseinflüsse.*
-  *Tratamiento en las dos caras para conseguir una superficie lisa y más limpia. Una protección resistente a la intemperie.*
-  *Trattamento sulle due facce per garantire una superficie liscia e meno sensibile allo sporco. Una protezione resistente alle intemperie.*







MADE IN  
 **FRANCE**

**REACH**  
COMPLIANCE



## ADVANTAGES

Avantages / Vorteile / Ventajas / Ventaggi

-  **All-weather resistant**  
*Résistant aux intempéries / Wetterbeständig*  
*Resistente a la intemperie / Resistente alle intemperie*
-  **Easier to clean**  
*Plus facilement nettoyable / Leichter zu reinigen*  
*Más fácil de limpiar / Più facile da pulire*
-  **Very good weldability**  
*Très bonne soudabilité / Sehr gute Schweißbarkeit*  
*Muy buena soldabilidad / Ottima saldabilità*
-  **Longer life**  
*Plus de longévité / Längere Lebensdauer / Mayor vida útil / Maggiore durata*
-  **Suppleness**  
*Souple / Flexibilität / Flexibilidad / Buona flessibilità*
-  **Smoother surface, less prone to soiling.**  
*Plus lisse et moins sujette aux salissures / Glatter und weniger schmutzanfällig*  
*Más lisa y menos adherente para las manchas / Più liscia e meno sensibile allo sporco.*

10 rue des Châteaux  
 BP 109 - Z.I. La Pilaterie  
 59443 Wasquehal Cedex - France  
 www.dickson-constant.com  
 contact@dickson-constant.com  
 Tél. +33 (0)3 20 45 59 59

## Performance fabrics for

Solar protection  
 Outdoor furniture  
 Indoor furniture  
 Marine furnishing  
 Flooring

  
**DICKSON**<sup>®</sup>  
 innovative textiles for your world

  
**GLEN RAVEN**<sup>™</sup>

Edition September 2017 - SAS DICKSON CONSTANT - capital 12.640.000 euros - 381 347 970 R.C.S. Lille Métropole - Glen Raven<sup>™</sup> is a trademark of Glen Raven, Inc. - Dickson Constant is a Glen Raven company - \*see general warranty conditions on www.dickson-constant.com

